


1. 25Gb/s 40km SFP

RTXM182-829 & RTXM182-830

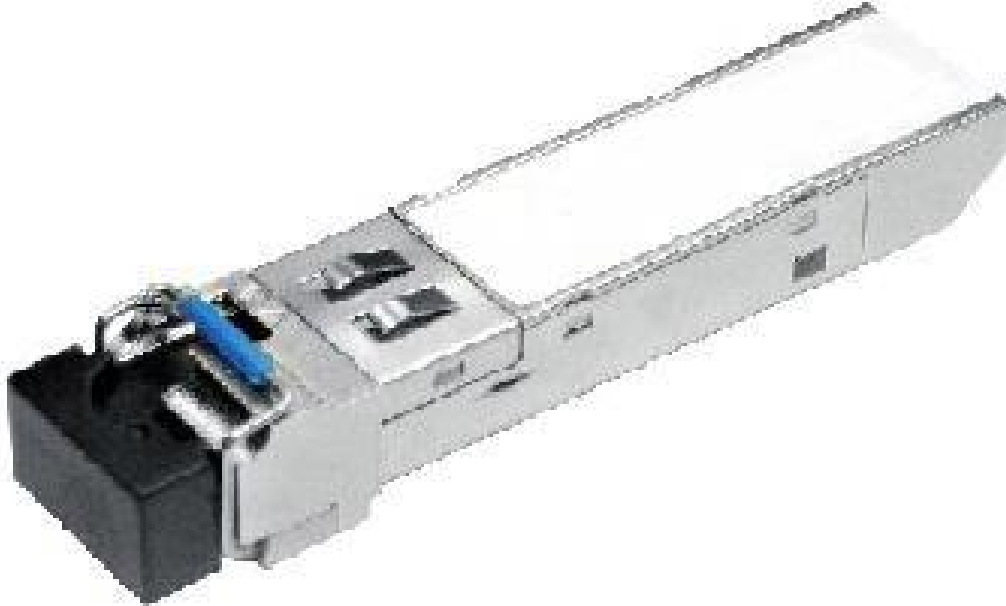

RTXM182-829	RTXM182-830	1.25Gb/s	LC	SFP	PIN
			EEPROM	-	.

LC

3.3V

1.25Gb/s

PECL

40


: -40°C ~+85°C

RoHS

-



SFP (1000BASE-SX)
IEEE 802.3
ITU-T G.957



1.25Gbps 23

RTXM182-829	SFP	1.25G	1310nm DFB-LD	-3~+2 dBm	PIN 1490nm	< -24dBm	-40~85° C	40km	GE
RTXM182-830	SFP	1.25G	1490nm DFB-LD	-3~+2 dBm	PIN 1310nm	< -24dBm	-40~85° C	40km	GE