

The 1550nm cooled EML laser based 10Gigabit SFP+

Pa N

S c ca

A ca

Pa a

S b

U

M

T

Ma

N




T a

This pin is open collector compatible, and should be pulled up to Host Vcc with a 10kΩ resistor.

3	TX Disable	Transmitter Disable In (LVTTL)	This pin is internally pulled up to VccT with a 10 kΩ resistor.
---	---------------	-----------------------------------	---

4	SDA		Serial ID with SFF 8472 Diagnostics
---	-----	--	-------------------------------------

Module Definition Identifiers

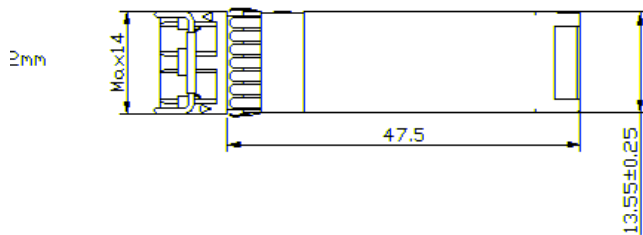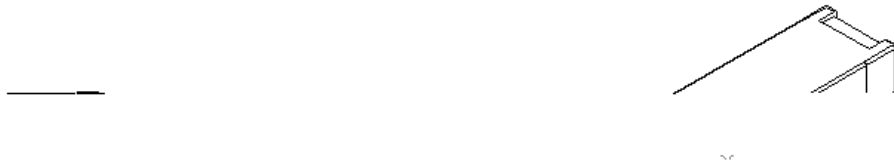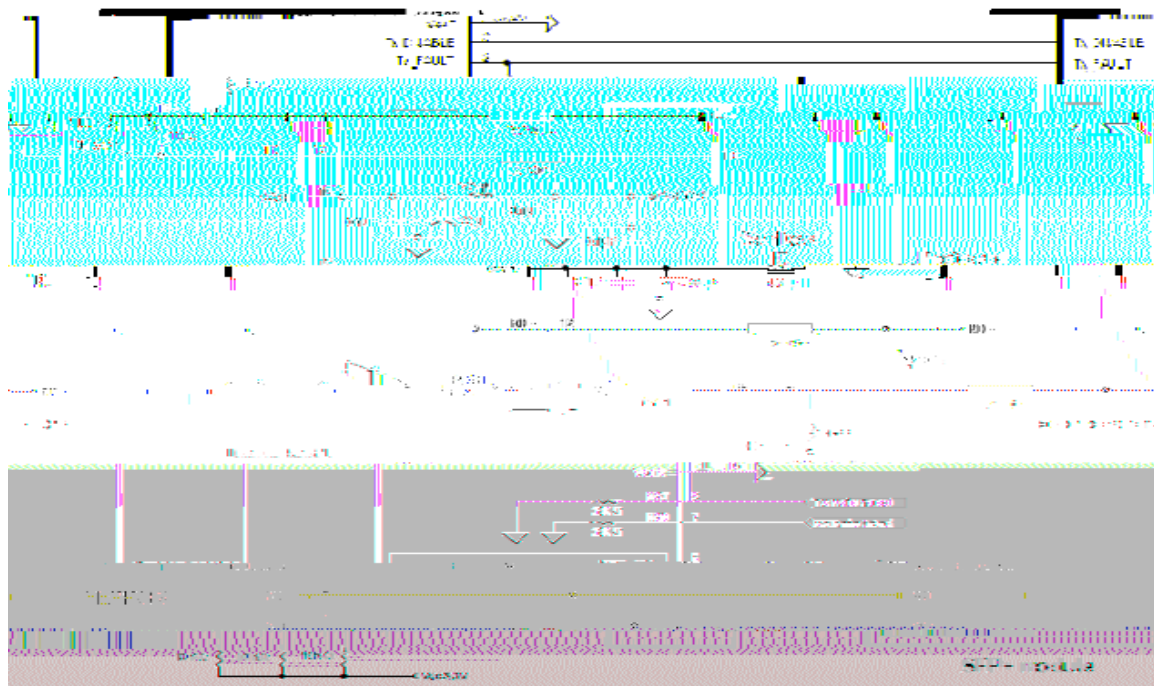

Unit: mm
Unspecified Tolerance: ±0.1

